


Zenith Z-985 Replica Type AB Battery Box for Use with **abbattery**

Instructions



1. Make sure radio is off and disconnect all connections to your **abbattery** power supply. Remove the **abbattery** from the radio
2. Carefully remove the **abbattery power pack** from the original box and place it in your new Zenith Z-985 replica battery box. The **abbattery** connector should line up with the hole in the box.
3. If you need to create a hole in the end panel for your 600 series dial light or 8G005 series radio filament supply, use an X-acto knife with a new #11 blade to cut an opening in the box the same size as the hole in your OEM box. If you don't want to cut a hole in the end panel, just pass the wire out between the lid and end panel. You can cut a small notch in the end panel, although I find this is not necessary as the wire is quite thin. **Ignore this step if you are using a separate 1.5v battery such as the replica Z-1 battery.**

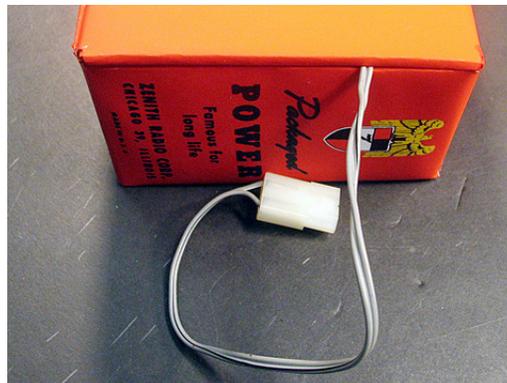

4. The front lid fits very snugly. Carefully close the lid to the box using a finger behind the lid to push the front of the box out slightly to allow the flap to slide between the power pack and front of the box. If you are having difficulty closing the lid, trim the front flap as needed to clear the **abbattery**.



5. Loop the included black ribbon around the Zenith Z-985 battery box, and completely slide the box into the battery compartment and reconnect all connections to the **abbattery** power supply. The ribbon helps remove the battery if the fit is tight.
6. Switch to the BC (AM) band and turn on your radio. It is now ready to use.